



OFF ROAD ROAD HUMP SECTION
SCALE : NTS

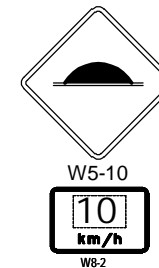

OFF ROAD ROADHUMP WARNING SIGNS
SCALE : NTS

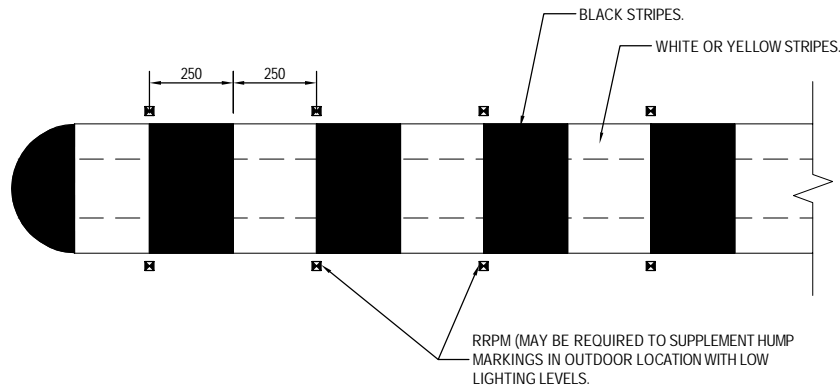

OFF ROAD ROAD HUMP MARKING
SCALE : NTS

NOTE:

1. FOR USE IN OFF ROAD LOW SPEED TRAFFIC LOCATIONS WITH LESS THAN 30 kph VEHICLE SPEED.
2. HEIGHT BETWEEN 25mm AND 75mm
3. RAMP ANGLE MUST BE 2:1 ACROSS FACE AND AT ENDS.
4. HUMP LENGTH TO SUIT AISLE WIDTH HOWEVER MINIMUM 1.0m WIDE SPACE SHALL BE PROVIDED AROUND ENDS FOR PEDESTRIAN ACCESSIBLE PATH OF TRAVEL NEEDS AROUND ENDS
5. AISLE LENGTH 100.0m AND GREATER, OR AISLES HAVE MORE THAN 50 PARKING SPACES, REQUIRE ROAD HUMPS.
6. HUMPS SHALL BE SPACED AS SPECIFIED ALONG AISLES.
7. PLACE W5-10,W8-2 SIGNS AS CLOSE AS POSSIBLE TO ROAD HUMPS WITH CLEAR SIGHT DISTANCE.
8. LOCATE CLEAR OF VEHICLE MANEUVERING AREAS, INTERSECTIONS & CURVED ROADWAYS.
9. LOCATE AT LEAST 10mm CLEAR OF EXTENSION JOINTS
10. LOCATE CLEAR OF DRAINAGE FLOW PATHS.
11. DESIGN AND LAYOUT TO COMPLY WITH AS AS2890.1:2004

ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE

	CITY OF CANTERBURY BANKSTOWN		STD DWG N°
	STANDARD OFF-ROAD ROAD HUMP		S-312
			Sheet N°: 1 of 1
GENERAL DETAILS			File Name: Draft S-312.dwg